

30 m - 1000 kg

32 m - 800 kg

DB 50

← CARICO COSTANTE →
CONSTANT

Kg 2000
m 14.3

← CARICO COSTANTE →
CONSTANT

Kg 800
m 31.2

← CURVA DI CARICO →
LOAD CURVE


Kg 800
m 31.6

Kg 2600
m 12.1

Kg 800
m 31.8

Kg 2600
m 13.3

Kg 1000
m 29.7

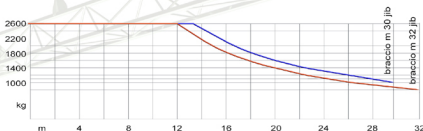

R m
2.18

9 x t 1.6
m 3.8 X 3.8
t 16.5


OPTIONAL

ASSALE STERZANTE
STEERING AXLE


OPTIONAL

AUTO - ZAVORRAMENTO
DERRICK


STANDARD



ASK FOR COMPLETE STANDARD AND OPTIONAL FEATURES



t 13.8



m 13.2

DIN 15018 - H1 B2/B3 - 15019 - 18800 (C) EN 14439 C25 - D25